



Table Wall Docking Station to Strut

www.QuakeHOLDIndustrial.com

Corporate Office:

1399 Specialty Drive
Vista CA 92081
Phone: (800) 232-7836
Fax: (760) 295-0235

Los Angeles Office:


411 South Vermont Ave.
Glendora CA 91741
Phone: (805) 551-1446
Fax: (760) 295-0235

San Francisco Bay Area Office:

26062 Eden Landing Rd.
Unit #2
Hayward CA 94546
Phone: (530) 333-7186
Fax: (760) 295-0235

Seattle Office:

420 South 96th Street
Seattle WA 98108
Phone: (800) 959-4053
Fax: (760) 295-0235

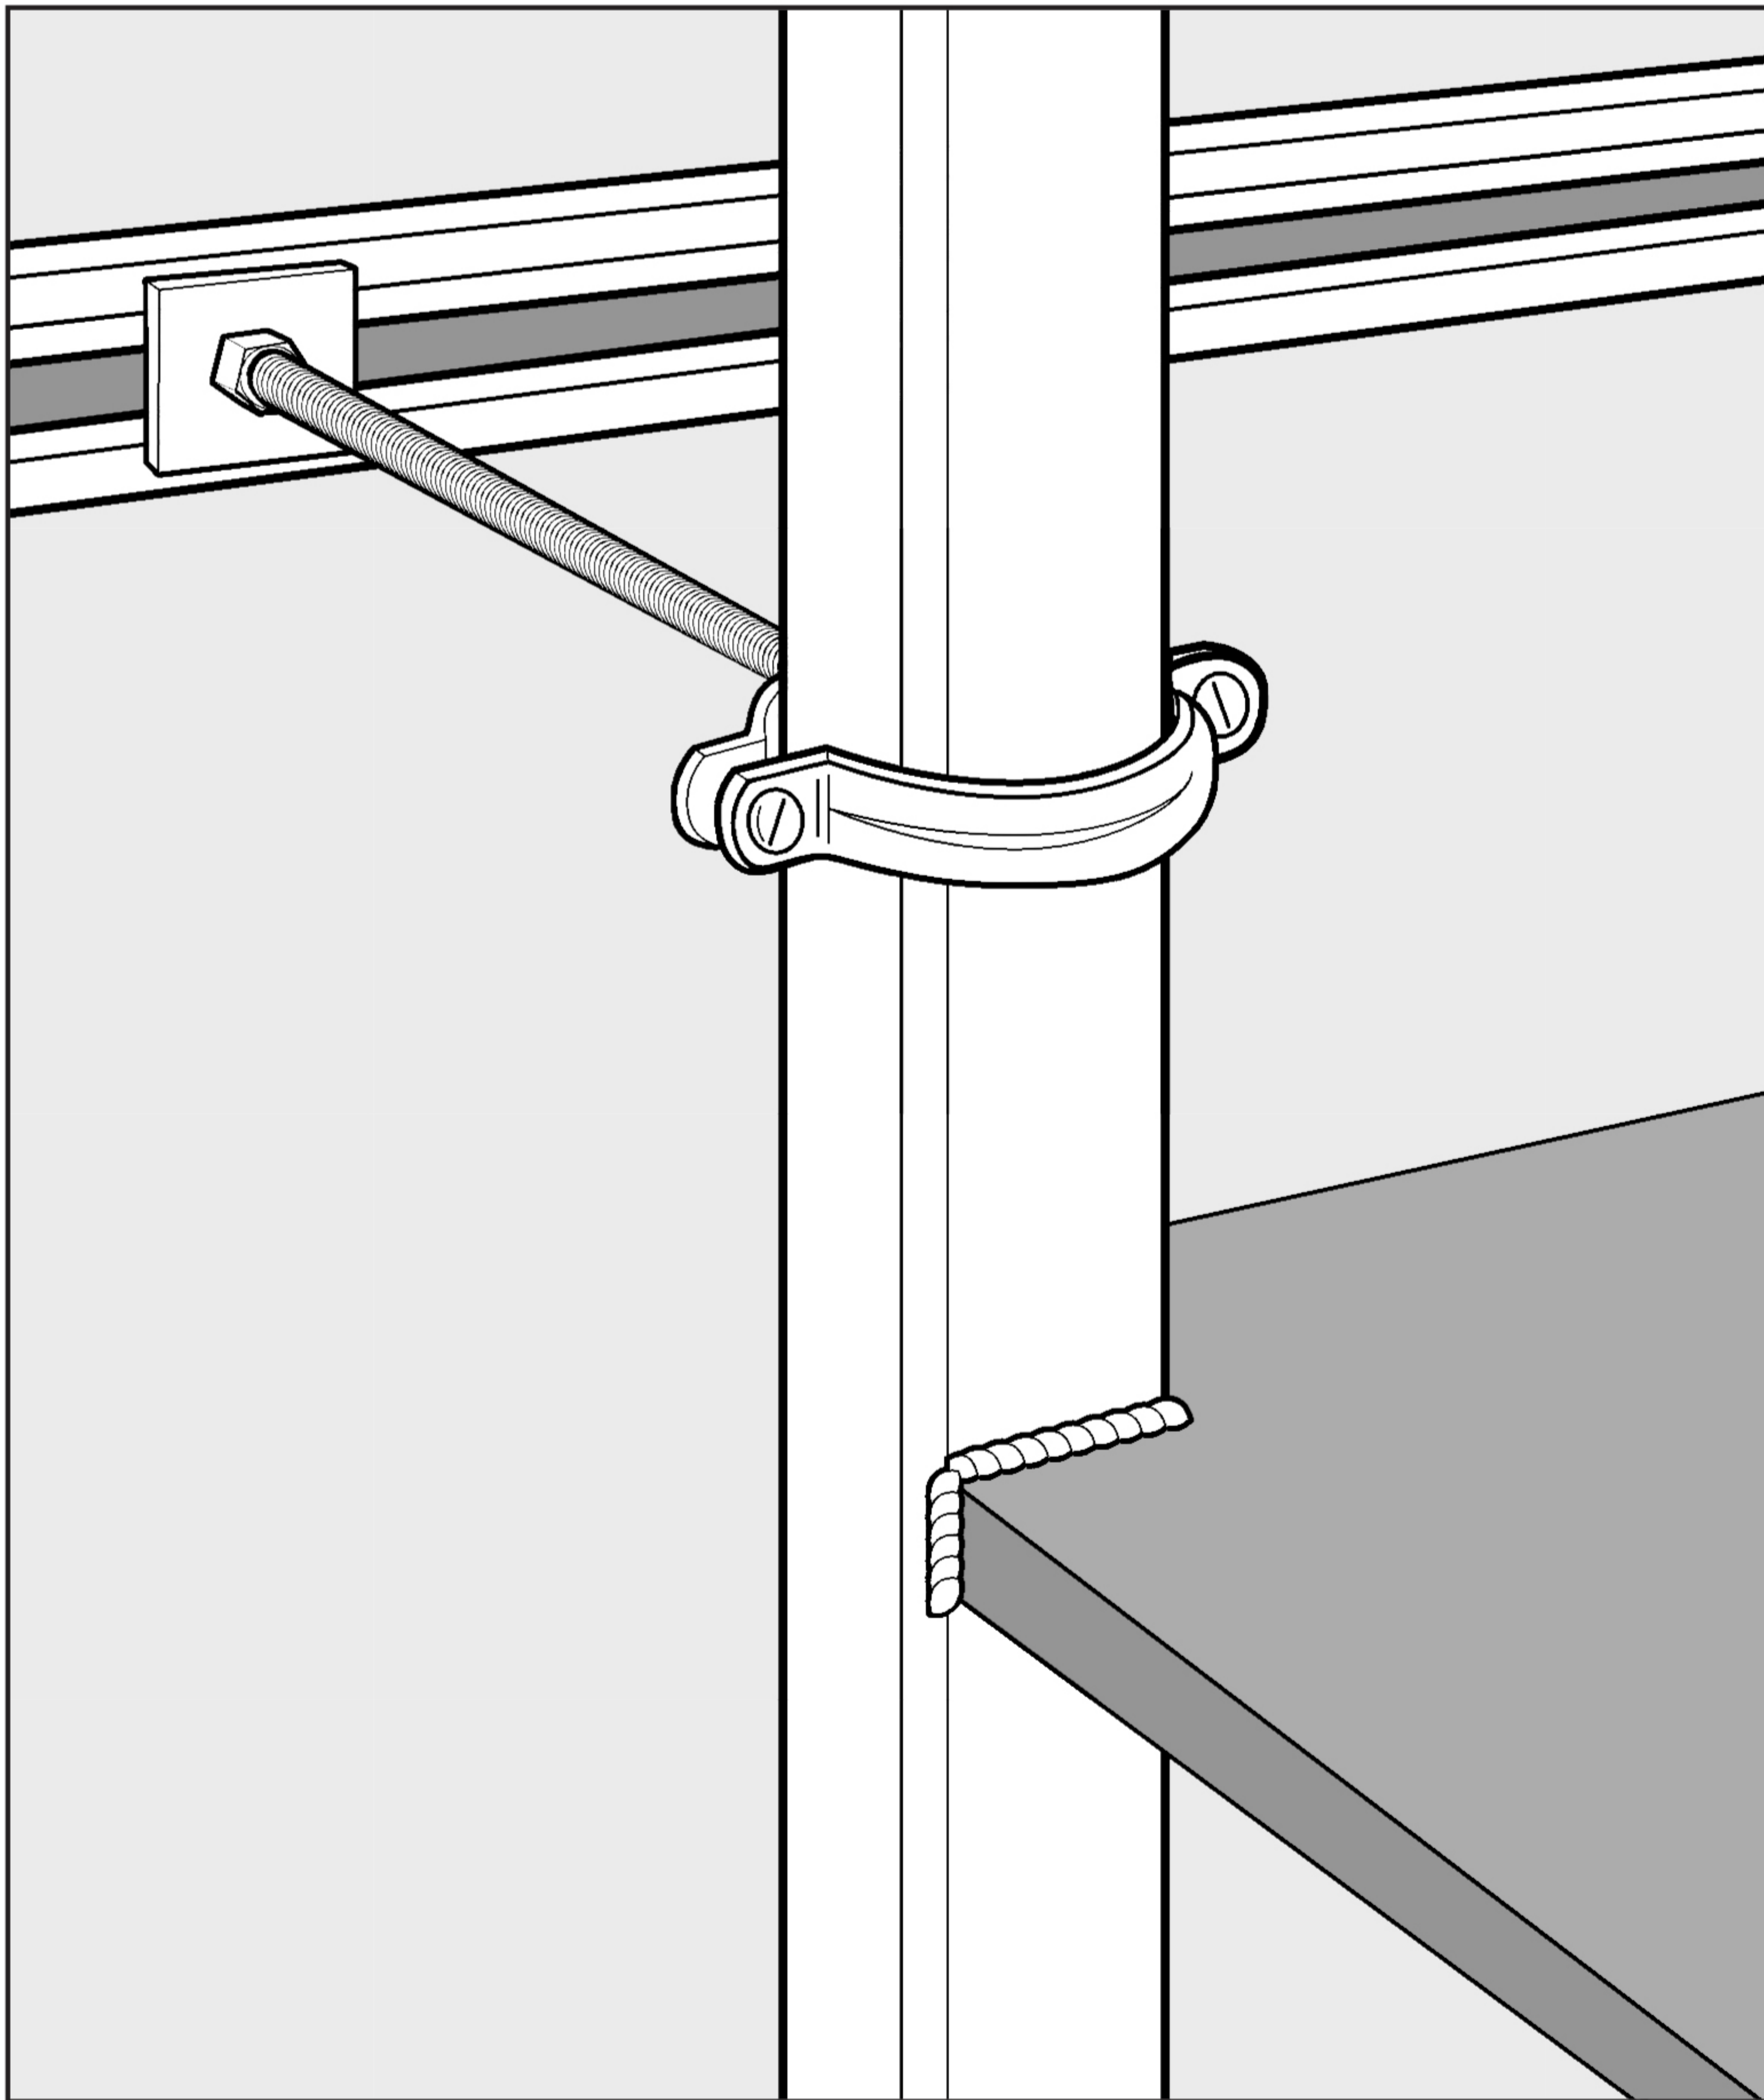

How it works:

Strut is mounted approximately 12" above the floor to a minimum of three wall studs. Split-ring leg fasteners are attached to the two back table legs. Threaded rod is cut to appropriate length and mounted to the split-ring leg fastener to join the table to the strut.

Tables can be easily moved from one location to another where strut has been installed.

Part Number: U6.TBL.Z

Strut:

- 1-5/8" x 1-5/8" x 72" metal strut spanning a minimum of three studs

Threaded Rod:

- 3/8" diameter threaded rod, adjusted to wall distance

Split-Ring Leg Fastener:

- 600 lbs. working load per table

Option: All components are available in stainless steel. Quote upon request.