

Fume Hood Leg Anchor - Seismic Fastening



www.QuakeHOLDIndustrial.com

Corporate Office:

1399 Specialty Drive
Vista CA 92081
Phone: (800) 232-7836
Fax: (760) 295-0235

Los Angeles Office:


411 South Vermont Ave.
Glendora CA 91741
Phone: (805) 551-1446
Fax: (760) 295-0235

San Francisco Bay Area Office:

26062 Eden Landing Rd.
Unit #2
Hayward CA 94546
Phone: (530) 333-7186
Fax: (760) 295-0235

Seattle Office:

420 South 96th Street
Seattle WA 98108
Phone: (800) 959-4053
Fax: (760) 295-0235

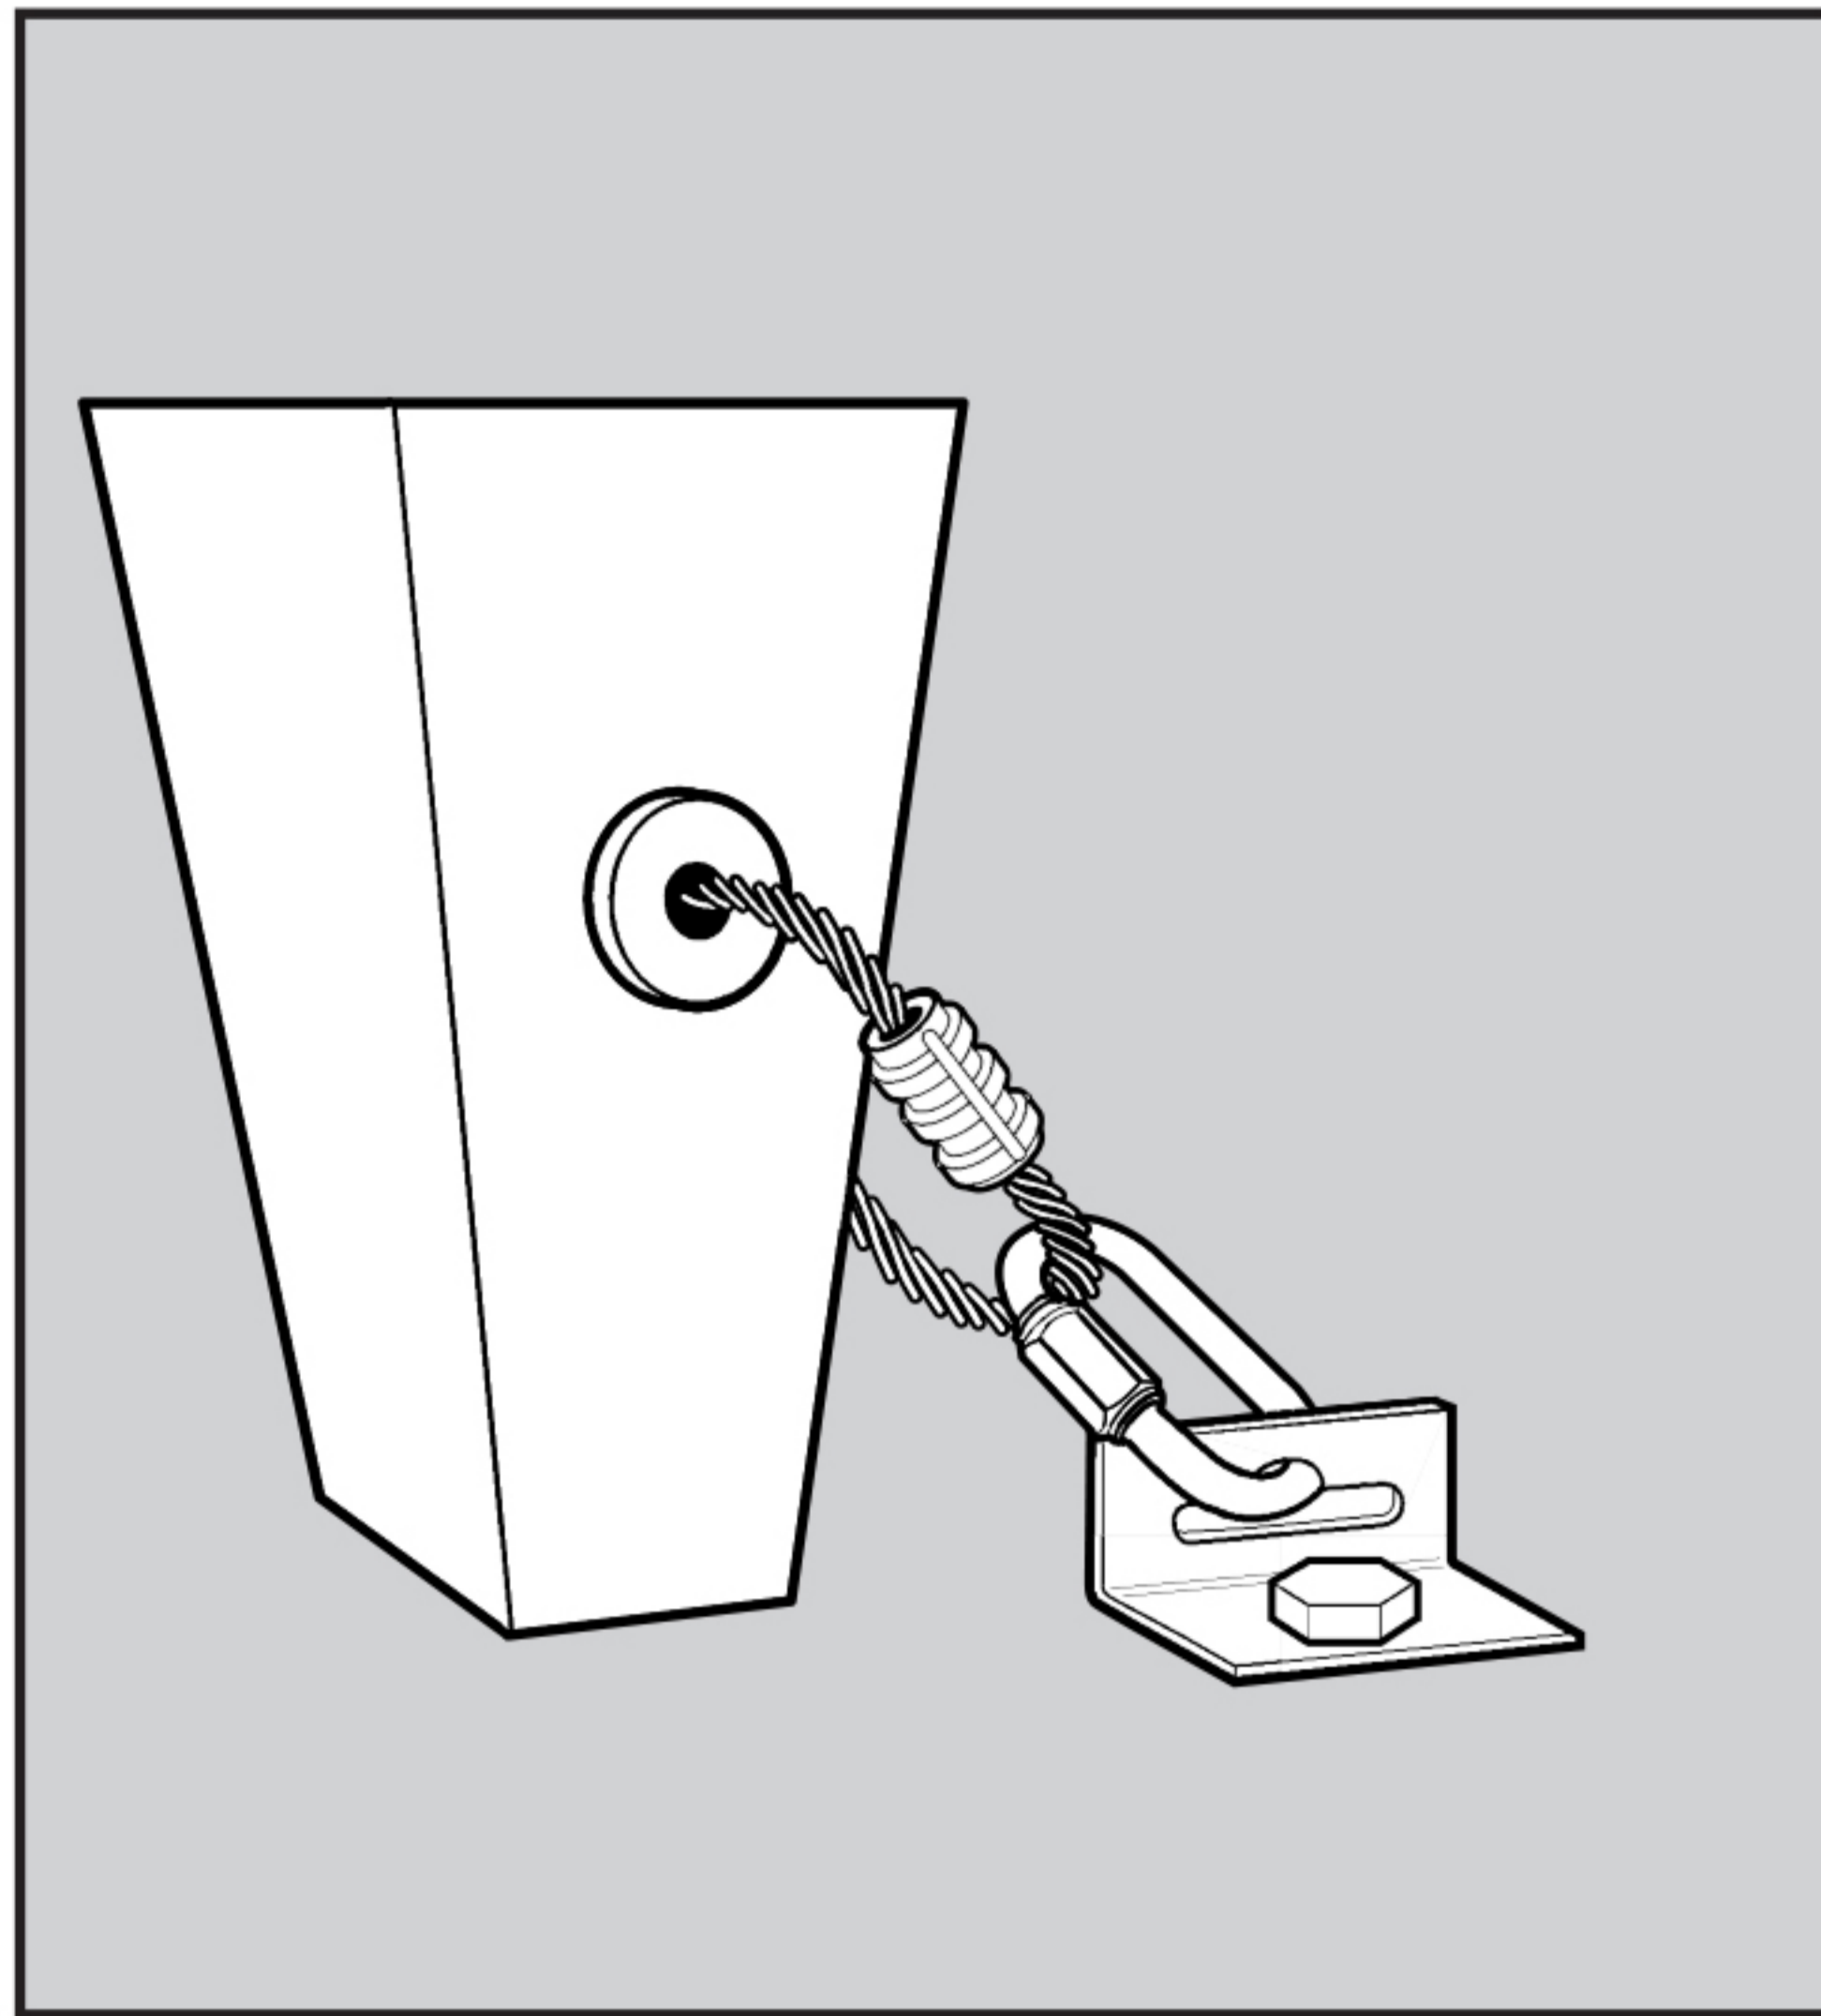

Name: Fume Hood Leg Anchor

Part Number: C/2

Color: Stainless Steel

Purpose: Restrain fume hood to the floor

Kit Contains: Stainless steel floor plate, anchor, cable, & quick link

Fastening Method: Floor plate is anchored to floor, cable loops around equipment frame

Anchor:

Type: HDI Drop -In Anchor

Ultimate load in tension: 7,140 lb

Ultimate load in shear: 8,500 lb

Removable: yes

Strength, based on 4,000 psi concrete

Cable: 3/16" diameter stainless steel cable: 3,400 lbs.

Quick Link: 1,540 lbs